

万能箱系列 UNIVERSAL CASES

B&W倍威万能箱，源于德国设计师的匠心打造，采用特制HDPE材料，坚固耐用，轻巧便携。凭借IP65防尘防水等级和国军标的严格认证，它能确保在各种条件下都能保持卓越性能，安全可靠。

这不仅仅是一款箱子，它是专业领域的得力伙伴，是您值得信赖的坚实屏障。B&W倍威万能箱，专业，就该如此无所不能。

B&W Universal Cases, a masterpiece crafted with German ingenuity. Built from premium HDPE material, it is not only robust and resilient but also incredibly lightweight. Boasting an IP65 dustproof and waterproof rating and certified by Mil-Std 810H, ATA 300, it ensures unparalleled performance in any condition.

B&W Universal Cases- "Professionalism, as it should be - Limitless and Uncompromising."



B&W在全球 B&W Worldwide

100
年成功经验

Up to 100 years
experience

75

个国家/地区

At home in
75 countries

全球销售网络

World-wide distribution
network

300

名雇员
Personnel


5

家以上工厂和
办事机构

Own
locations

多样化的解决方案
和技术能力

Diversity of solutions
and technological prowess

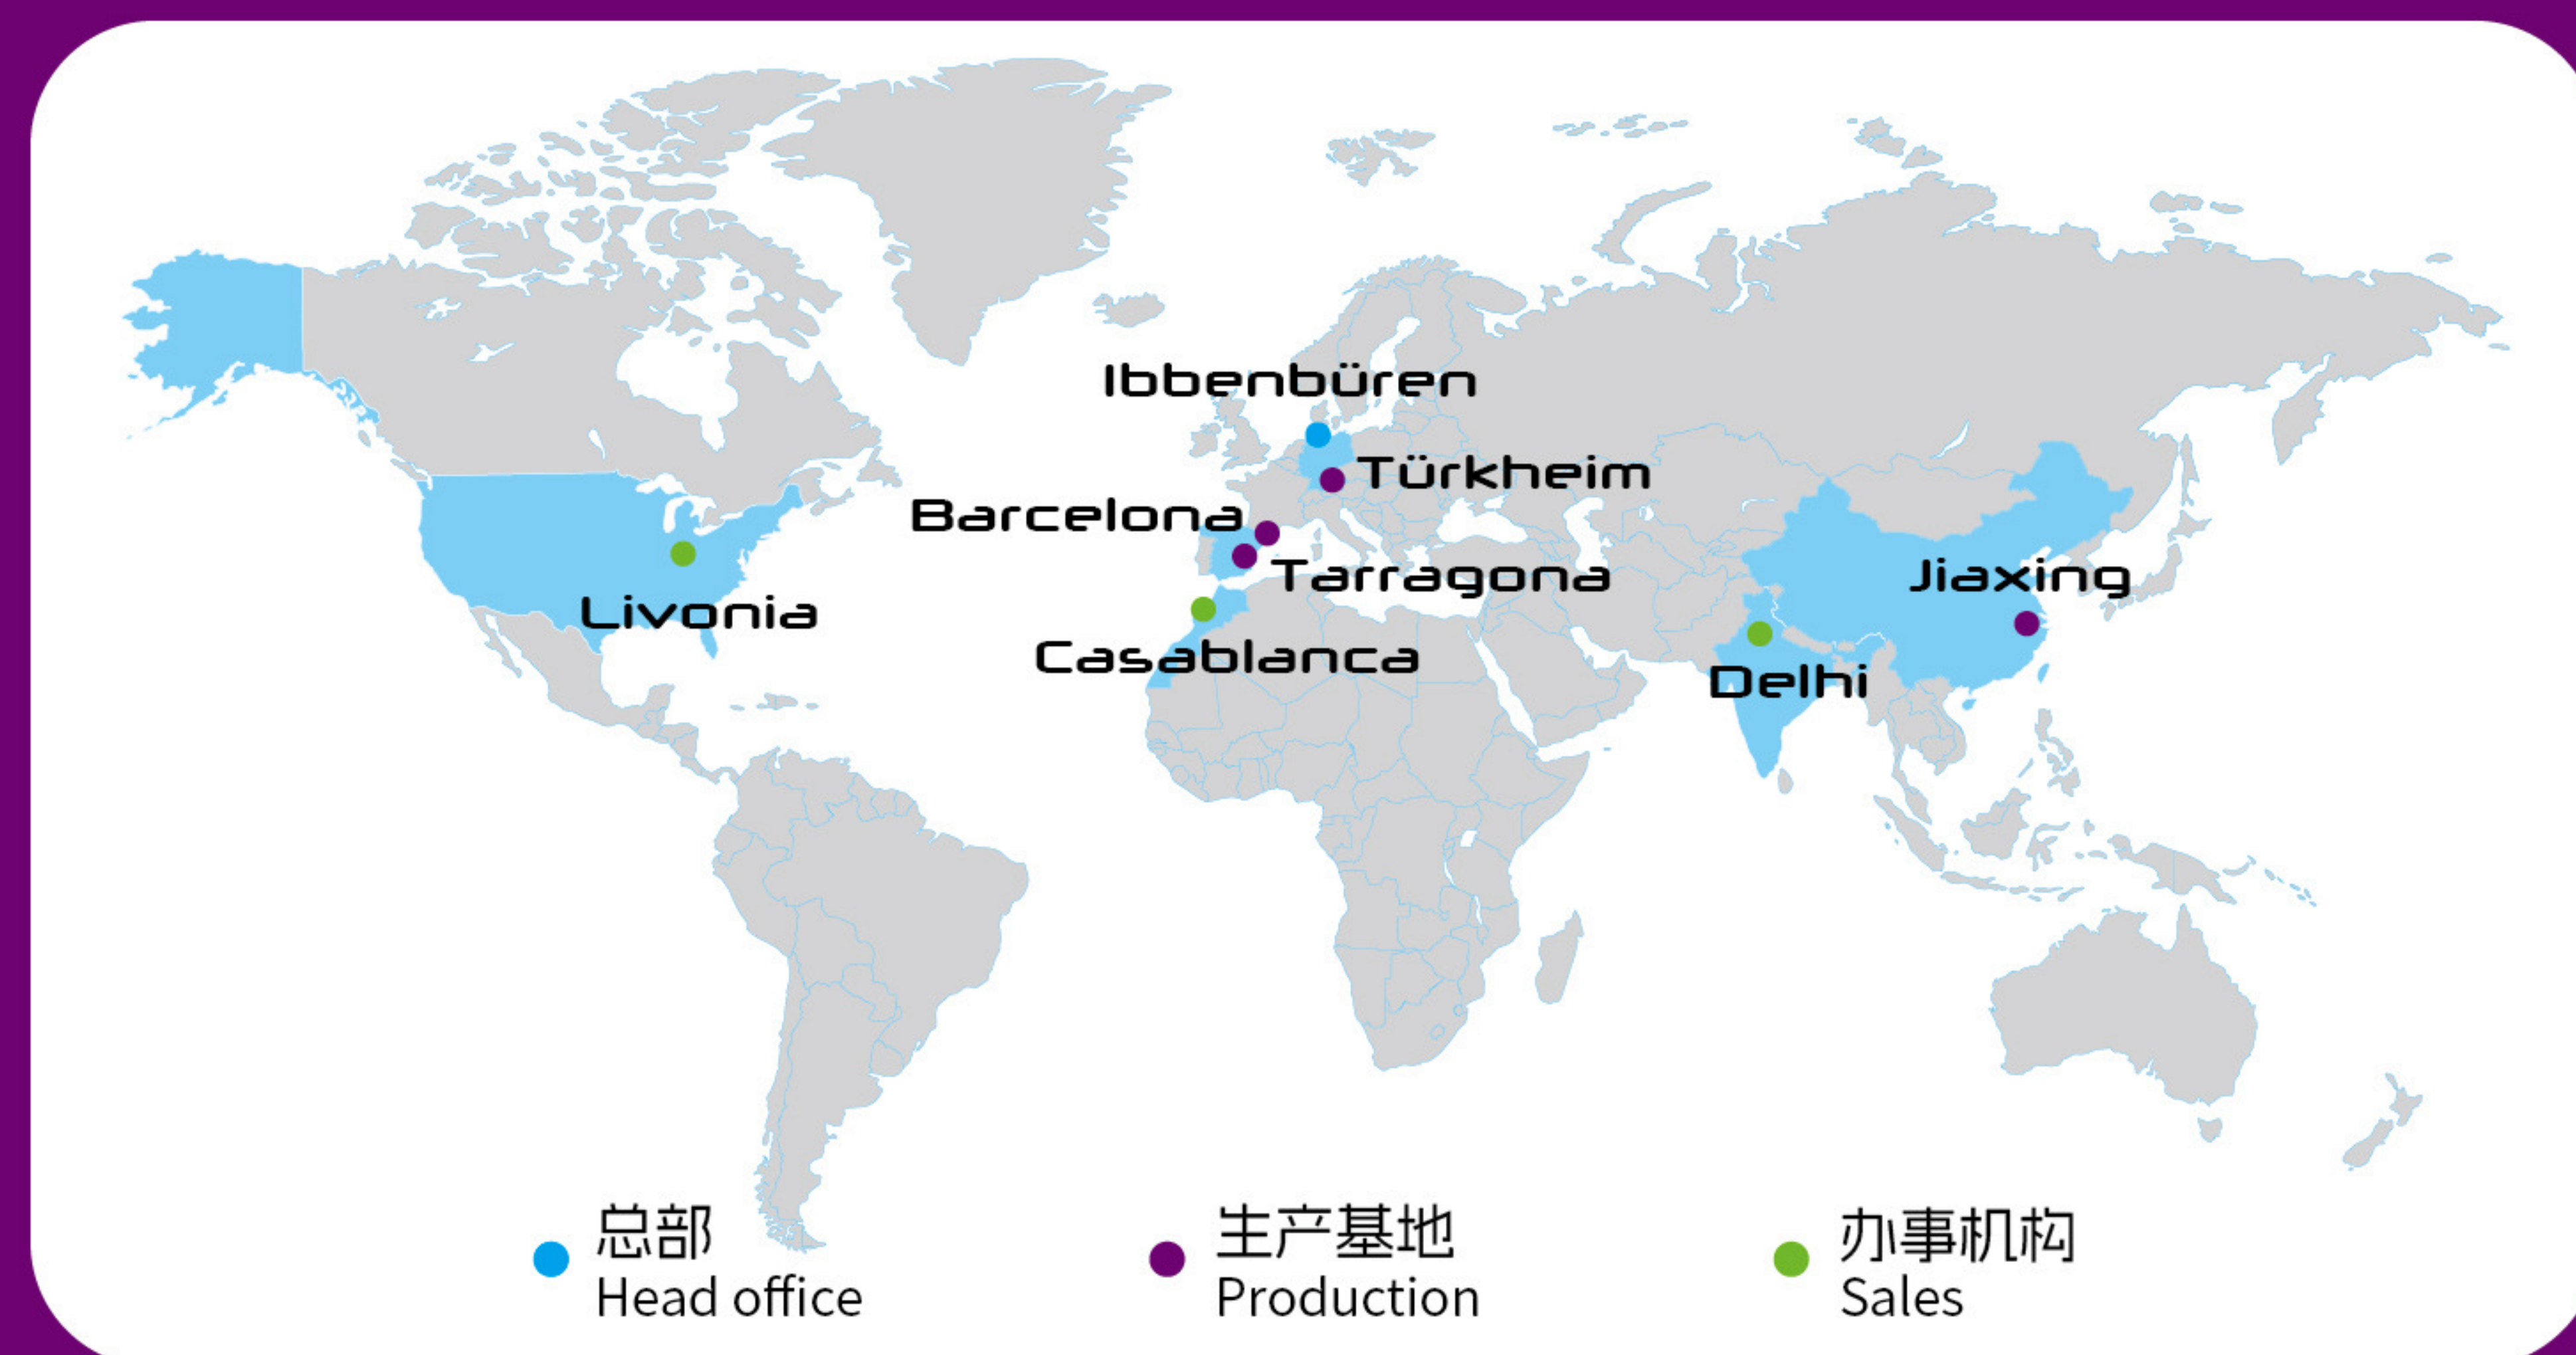

倍威实业（嘉兴）有限公司

B&W(Jiaxing) Co.,Ltd

浙江省嘉兴市经济技术开发区丰华路997号

No.997 Fenghua Road, Jiaxing Economic and Technological Development Zone,
Jiaxing 314036, Zhejiang, P.R.China

☎ 国内业务(Domestic Sales Dept.): +86 573 8269 3229

☎ 国际业务(Int'l Business Dept.): +86 573 8269 3528



微信公众号

WeChat official account



*测试方法因安全箱尺寸不同而有差异
*Test procedure depends on case size

已通过以下测试/认证:

Tests/Certificates

IP 65

防尘防水国际认证标准

Mil-Stnd 810H

美军标环境可靠性试验标准H

ATA 300

美国航空运输协会器材包装规范

GJB150.3A-2009

国军标高温存储试验

GJB150.4A-2009

国军标低温存储试验

GJB150.5A-2009

国军标温度冲击试验

GJB150.16A-2009

国军标振动试验

GJB150.18A-2009

国军标机械冲击试验

U29.01

- 内尺寸 | internal dimensions
517*326*175 mm / 20.3*12.8*6.8 inch
- 外尺寸 | external dimensions:
545*400*220 mm / 21.5*15.8*8.7 inch
- 容积 | volume: 29L • 净重 | weight: 3.1kg



U55.01

- 内尺寸 | internal dimensions
557*427*233 mm / 21.9*16.8*9.1 inch
- 外尺寸 | external dimensions:
585*500*285 mm / 23.1*19.7*11.2 inch
- 容积 | volume: 55L • 净重 | weight: 4kg



U55.02

- 内尺寸 | internal dimensions
557*427*233 mm / 21.9*16.8*9.1 inch
- 外尺寸 | external dimensions:
600*500*310 mm / 23.7*19.7*12.3 inch
- 容积 | volume: 55L • 净重 | weight: 5.2kg



U58.01

- 内尺寸 | internal dimensions
570*457*224 mm / 22.4*17.9*8.8 inch
- 外尺寸 | external dimensions:
620*530*280 mm / 24.4*20.9*11 inch
- 容积 | volume: 58L • 净重 | weight: 5kg



U74.01

- 内尺寸 | internal dimensions
630*430*275 mm / 24.8*16.9*10.8 inch
- 外尺寸 | external dimensions:
665*505*320 mm / 26.2*19.9*12.6 inch
- 容积 | volume: 74L • 净重 | weight: 5kg



U74.02

- 内尺寸 | internal dimensions
630*430*275 mm / 24.8*16.9*10.8 inch
- 外尺寸 | external dimensions:
685*505*340 mm / 27*19.9*13.4 inch
- 容积 | volume: 74L • 净重 | weight: 6.3kg



art. No. 款号	internal dimensions 内尺寸	external dimensions 外尺寸	volume 容量	weight 重量	telescopic handle 拉杆	locking latch 锁扣	hinge 铰链	bottom feet 箱脚	ergonomic handle 人体工学 手把	side handle 侧面 手把
U29.01 ■ ■	517*326*175 mm / 20.3*12.8*6.8 inch	545*400*220 mm / 21.5*15.8*8.7 inch	29L	3.1kg		2	2	4	1	0
U55.01 ■ ■	557*427*233 mm / 21.9*16.8*9.1 inch	585*500*285 mm / 23.1*19.7*11.2 inch	55L	4kg		2	2	4	1	0
U55.02 ■ ■	557*427*233 mm / 21.9*16.8*9.1 inch	600*500*310 mm / 23.7*19.7*12.3 inch	55L	5.2kg	✓	2	2	4+2	1	1
U58.01 ■ ■	570*457*224 mm / 22.4*17.9*8.8 inch	620*530*280 mm / 24.4*20.9*11 inch	58L	5kg		2	2	4	1	1+1
U74.01 ■ ■	630*430*275 mm / 24.8*16.9*10.8 inch	665*505*320 mm / 26.2*19.9*12.6 inch	74L	5kg		2	2	4	1	0
U74.02 ■ ■	630*430*275 mm / 24.8*16.9*10.8 inch	685*505*340 mm / 27*19.9*13.4 inch	74L	6.3kg	✓	2	2	4+2	1	1
U114.01 ■ ■	770*500*295 mm / 30.3*19.6*11.6 inch	805*575*340 mm / 31.7*22.7*13.4 inch	114L	7.3kg		2	3	6	1	1+1
U114.02 ■ ■	770*500*295 mm / 30.3*19.6*11.6 inch	820*575*365 mm / 32.3*22.7*14.4 inch	114L	8.2kg	✓	2	3	6+2	1	1+1
U150.01 ■ ■	530*550*515 mm / 20.8*21.6*20.2 inch	605*625*570 mm / 23.9*24.6*22.5 inch	150L	7.2kg		6	0	0	0	2+2
U176.01 ■ ■	1170*450*335 mm / 46*17.7*13.1 inch	1210*535*390 mm / 47.7*21*15.4 inch	176L	10.3kg		4	4	8+2	1	1+1
U255.01 ■ ■	845*575*525 mm / 33.2*22.6*20.6 inch	920*640*575 mm / 36.3*25.2*22.7 inch	255L	9.9kg		5	3	0	0	2+2
F&T 2 ■	510*360*345 mm / 20*14.2*13.6 inch	570*430*420 mm / 22.4*16.9*16.5 inch	63L	6kg	✓					
F&T 3.01 ■	710*500*395 mm / 28*19.7*15.6 inch	770*570*420 mm / 30.3*22.4*16.5 inch	140L	8.5kg						
F&T 3.02 ■	710*500*345 mm / 28*19.7*13.6 inch	770*570*420 mm / 30.3*22.4*16.5 inch	122L	9kg	✓					

U114.01

- 内尺寸 | internal dimensions
770*500*295 mm / 30.3*19.6*11.6 inch
- 外尺寸 | external dimensions:
805*575*340 mm / 31.7*22.7*13.4 inch
- 容积 | volume: 114L • 净重 | weight: 7.3kg



U114.02

- 内尺寸 | internal dimensions
770*500*295 mm / 30.3*19.6*11.6 inch
- 外尺寸 | external dimensions:
820*575*365 mm / 32.3*22.7*14.4 inch
- 容积 | volume: 114L • 净重 | weight: 8.2kg



F&T 3.01

- 内尺寸 | internal dimensions
710*500*395 mm / 28*19.7*15.6 inch
- 外尺寸 | external dimensions:
770*570*420 mm / 30.3*22.4*16.5 inch
- 容积 | volume: 140L • 净重 | weight: 8.5kg



F&T 3.02

- 内尺寸 | internal dimensions
710*500*345 mm / 28*19.7*13.6 inch
- 外尺寸 | external dimensions:
770*570*420 mm / 30.3*22.4*16.5 inch
- 容积 | volume: 122L • 净重 | weight: 9kg



U150.01

- 内尺寸 | internal dimensions
530*550*515 mm / 20.8*21.6*20.2 inch
- 外尺寸 | external dimensions:
605*625*570 mm / 23.9*24.6*22.5 inch
- 容积 | volume: 150L • 净重 | weight: 7.2kg



U176.01

- 内尺寸 | internal dimensions
1170*450*335 mm / 46*17.7*13.1 inch
- 外尺寸 | external dimensions:
1210*535*390 mm / 47.7*21*15.4 inch
- 容积 | volume: 176L • 净重 | weight: 10.3kg



产品特性 Product features



U255.01

- 内尺寸 | internal dimensions
845*575*525 mm / 33.2*22.6*20.6 inch
- 外尺寸 | external dimensions:
920*640*575 mm / 36.3*25.2*22.7 inch
- 容积 | volume: 255L • 净重 | weight: 9.9kg



F&T 2

- 内尺寸 | internal dimensions
510*360*345 mm / 20*14.2*13.6 inch
- 外尺寸 | external dimensions:
570*430*420 mm / 22.4*16.9*16.5 inch
- 容积 | volume: 63L • 净重 | weight: 6kg



颜色可选 Color selectable



锁扣可选 Lock selectable



定制服务 Customization



环境监测工程师 的成功故事

The Environmental Monitoring Engineer success story

范是一位环境监测工程师，他的主要职责是实地采集环境数据，评估环境质量，了解污染物的排放情况，他的环境空气检测仪在倍威万能箱U55.01的保护下完好无损。

Fan, an environmental monitoring engineer, gathers field data, assesses the quality of the environment, and comprehends emissions of pollutants. His environmental air detector remains intact under the optimal protection of B&W U55.01 case.

